



Multifunctions Unblocking 400 ml (S152/ES)

This is a specific spray with a big unlocking and protective power for mechanicals parts. It unlocks, protects, and removes rust and oxidations. All this in only one spray!




Quantity	400 ml
Barcode	EAN 13: 8034108893471
Box / Case	12 pz

UNBLOCKING – A penetrating synthetic fluid with a high solvent and releasing power. It supports the releasing process of bolts, joints, threads, hinges and all other mechanical parts from rust and oxidation. It also leaves a long lasting waterproof and water repellent protective film.

Technical Specifications:

Aspect	Tin-Plate can containing under pressure fluid
Color	Light brown
Odour	Characteristic of solvent
Relative density	at 20°C 0,67 ÷ 0,71 g/ml
Flash point	Und .0° C extremely flammable
Pressure at 20°C	4/6 bar
Melting/freezing point	< -66°C (liquid base)
Boiling point	Around 176°C (liquid base)
Vapor tension	> 5 bar (20°C)
Viscosity	< 1 cSt - 9 cSt 40°C (oily base)
Solubility	Insoluble in water
Operating temperature	-50°C / +130 °C c.a.
Flash point	40 °C (liquid base)

HOW TO USE: Shake well before use. Spray the product on the part to treated, leave for a few minutes, in the case of rusted parts proceed with the unlocking. In presence of more resistant deposits repeat the operation. The product can be also be sprayed with the straw attached to the cap. **PRECAUTIONS:** Do not apply to equipment in tension. Do not apply to materials overheated.

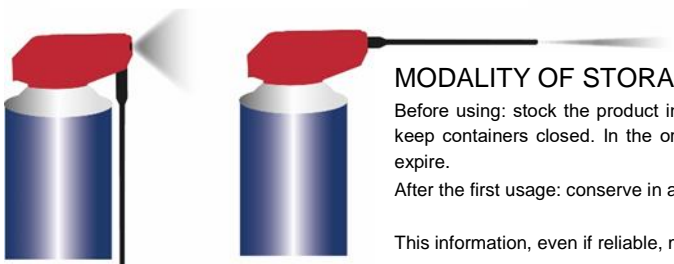

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 0°C and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months (warranty). The product doesn't expire.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product,

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT